

## EASY

## TECHNICAL INFORMATION



L 1600  
W 800  
H 705-1205 (2);  
610-1260 (3)

L 1600  
W 1640  
H 705-1205 (2);  
610-1260 (3)(2);  
610-1260 (3)

H 680-1180 (2)  
585-1235 (3)

L 1400; 1600; 1800  
W 800  
H 25

## Desktop

- 25 mm MFC (melamine);
- 2 mm ABS edges;
- With or without a cut-out for wire management.

## Frame (adjustable, telescopic)

- L angle dimensions: 40x40x634 mm; 50x50x460 mm;
- Adjustment range - 300 mm;
- Steel stripe for adjustment - 35x690 mm;
- Powder coated metal, matches the colour of columns and feet.

## Feet

- Rectangular metal tube dimensions: 79x60x33 mm (l);
- Metal sheet dimensions: 700x70x30 mm (W);
- Powder coated metal, matches to the colour of frame and columns;

## Lifting columns

- Two motors;
- Soft start and soft stop;
- Lifting speed: up to 38 mm/ sec;
- Stroke length: DL15/ DL16 - 500/ 650 mm;
- Height: DL15/ DL16 - 705-1205/ 610-1260 mm;
- Rectangular tube dimensions: DL15/ DL16 - 43,5x73,5, 37x67 mm/ 50x80 mm, 43,5x73,5, 37x67 mm;
- Lifting capacity: up to 80 kg;
- Powder coated metal, matches the colour of frame and feet.

## Electronic data power unit

- Input: 110-240 V;
- Frequency: 50/60 Hz;
- Output: 18 V;
- Power Plug: EU, UK;
- Energy consumption: standby 0,01 W;
- Operating Cycle: 1 minute on, 9 minutes off.

## Height adjustment button types



BA

TE

TA


## Types of feet



W

l

## Types of columns



2

3

## MATERIALS

Melamine:



Metal:



## FEATURES

- EASY sit-stand desk is equipped with two motors
- Two types of lifting columns - Linak DL15 and Linak DL16
- Telescopic frame
- Two types of feet

## QUALITY STANDARD


- EN 527-1:2011
- EN 527-2:2002
- EN 527-3:2003
- ISO 21016:2007

## GUARANTEE

- 5 year for standard furniture

## ORDERING EXAMPLE

Code structure

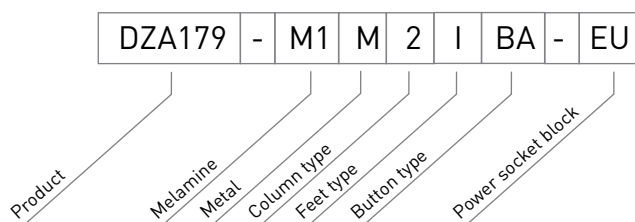

## Optional



Grommet



Cable trays



Power socket blocks



Cable ducts



Screens



Felt-lined metal drawer with lock