
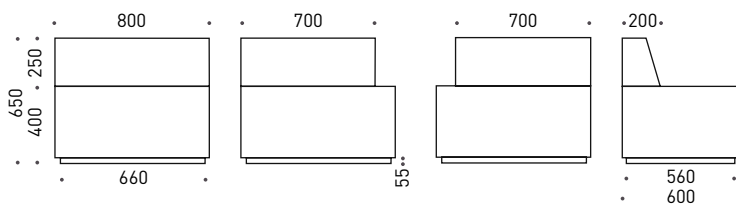
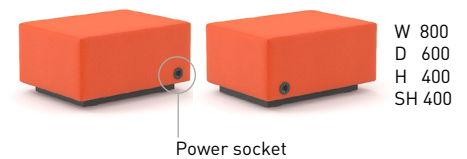



JAZZ CHILL OUT

TECHNICAL INFORMATION



Frame

- Made from 15mm plywood and 15mm chipboard, poufs with backrest also has 40x30x2 mm metal tube;
- Backrest frame made from 15 mm plywood, 25 mm chipboard and 25x25x1,5 mm metal tube.

Padding

- Frame top coated by foam HR5050 (density: 48-51 kg/m³), lower layer of the foam HR3030 (density: 28-32 kg/m³); frame sides coated by foam HR3030 (density: 28-32 kg/m³);
- Backrest frame coated by foam HR5050 (density: 48-51 kg/m³).

Seat

- Black painted rectangular metal base (50x20x1,5mm) with 4 plastic supports (5mm);
- Ability to order linking parts (2 pcs.), which allow linkage of the poufs to lines.

Power socket

- Power sockets by "Bachmann" (EU, UK, FR);
- 1 socket for 230 V;
- Cable length 1,5 meters.

MATERIALS

- Fabric: XTREME PLUS, TWIST, VELITO;
- Genuine leather: DNN;
- Leather look: RNN.

FEATURES


- Easily transformed pouf system, which is very convenient for its design and shape simplicity

GUARANTEE


- 3 years

ORDERING EXAMPLE


Code structure

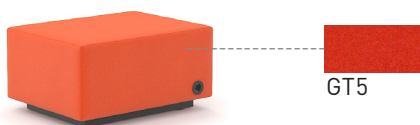

G5R015 - GT5 - EU

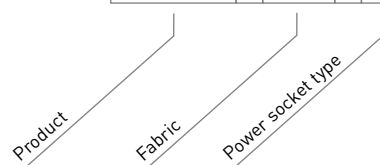

Optional



Metal table placed on the pouf (black or white colour)



Linking parts (2 pcs.), which allow linkage of the poufs to lines (black colour)